


Datasheet

COMpact ISDN Module

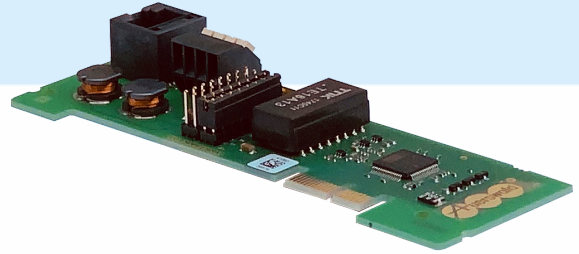

Extension for COMpact 3000 by a variable ISDN port for internal and external connection of ISDN devices

Your advantages in detail

Extension by a variable ISDN port (external/internal). When used as an internal port, you can choose between S_0 (4-wire) and U_{P0} (2-wire) modes and system

phones from the COMfortel family or other ISDN devices can be connected.

Features at a glance

MODULE FUNCTIONS

- A variable ISDN port (external/internal), internal: choice between S₀ (4-wire) or U_{P0} (2-wire) modes

COMPATIBLE PRODUCTS

- 90577 / COMpact 3000 ISDN

TECHNICAL SPECIFICATIONS

- Trunk connection: 0-1 S₀ port, Euro-ISDN (DSS-1), point-to-multipoint (PTMP) or PBX connection (PTP)
- Internal ISDN port: 0-1 S₀/U_{P0} port, Euro-ISDN (DSS-1), point-to-multipoint (PTMP)

DELIVERY

- COMpact ISDN Module

ORDERING INFORMATION

Designation: [COMpact ISDN Module](#)

Article number: [90581](#)

EAN Code: [4019377905814](#)